

USB 2.0 Ranger® 2324/2344 Extenders

4-port USB 2.0 Fiber Extender Systems

The USB 2.0 Ranger® 2324 extends high-speed USB 2.0 connections up to 500m using multimode fiber while the USB 2.0 Ranger 2344 extends up to 10km over singlemode fiber optics.

LEX

REX



Features

The Ranger 2324 and Ranger 2344 are ideal for extending USB peripherals including: keyboards, mice, interactive whiteboards, flash drives, hard drives, audio devices, web cameras and any other USB device across a dedicated fiber optic connection. Key features include:


- Supports USB 2.0 throughputs of up to 480Mbps
- Supplies up to 1 Amp per USB port; 600mA when all four ports are used concurrently
- Integrated hub provides ports for four USB devices, use hubs to add more
- Electrical isolation
- Reliable operation with USB 2.0 and 1.1 devices and hubs

Includes the ExtremeUSB® suite of features:

- Transparent USB extension
- True plug and play; no software drivers required
- Works with all major operating systems: Windows®, macOS™, Linux® and Chrome OS™

Applications

- Medical
- Keyboard and mouse extension
- Sensor/data acquisition
- Industrial control

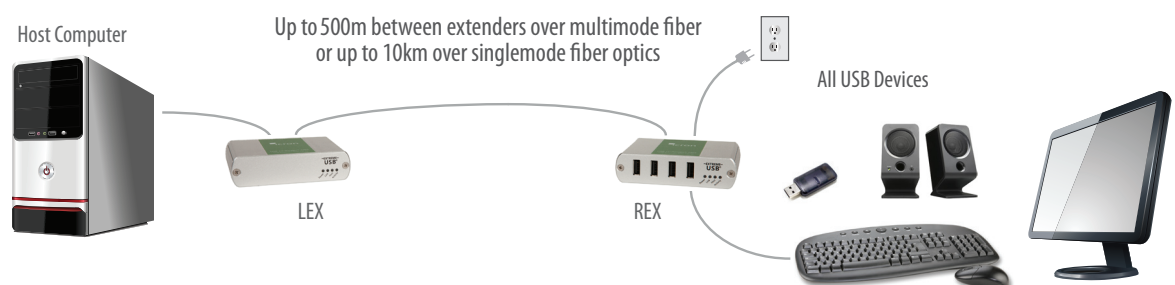

icron
Now Part of Maxim Integrated

**EXTREME
USB**

Specifications subject to
change without notification.
©2019
Icron Technologies Corp.
Now Part of Maxim Integrated
#90-01484-A02

USB 2.0 Ranger® 2324/2344 Specifications

Ranger 2324



Ranger 2344



DISTANCE

Ranger 2324:

Up to 500m over Multimode Fiber (OM2+)

Ranger 2344:

Up to 10km over Singlemode Fiber

USB DEVICE SUPPORT SPEEDS

Maximum Throughputs:

USB 2.0: Up to 480Mbps, USB 1.1: Up to 12Mbps

Traffic Types:

All USB 2.0 and 1.1 Traffic Types

Device Types:

All USB 2.0 and 1.1 Device Types

Maximum Number:

Up to 30 devices

LEX (LOCAL EXTENDER)

USB Connector:

1 x USB Type B Receptacle

Link Connector:

1 x SFP Duplex LC

Dimensions:

100.0mm x 76.0mm x 26.0mm (3.9" x 3.0" x 1.0")

Enclosure Material:

Silver Anodized Aluminum

REX (REMOTE EXTENDER)

USB Connectors:

4 x USB Type A Receptacles

Link Connector:

1 x SFP Duplex LC

Dimensions:

100.0mm x 76.0mm x 26.0mm (3.9" x 3.0" x 1.0")

Enclosure Material:

Silver Anodized Aluminum

Available Current:

Up to 600mA to each USB port concurrently

Power Supply:

100-240V AC Input, 24V 1A DC Output

ENVIRONMENTAL

Operating Temperature:

0°C to 50°C (32°F to 122°F)

Storage Temperature:

-20°C to 70°C (-4°F to 158°F)

Operating Humidity:

20% to 80% Relative Humidity, Non-Condensing

Storage Humidity:

10% to 90% Relative Humidity, Non-Condensing

COMPLIANCE

EMC:

FCC (Class B), CE (Class B)

Environmental:

RoHS2 (CE)

SUPPORT

Warranty:

2-year

Ordering Information

Both USB 2.0 Ranger 2324 and Ranger 2344 systems include a LEX, REX, USB 2.0 cable, Quick Start Guide, an international power adapter with country specific power cord

PART #	NAME	DESCRIPTION
00-00411	USB 2.0 Ranger 2324 - NA	4-Port USB 2.0 500m Multimode Fiber Optic Extender System, 100-240V Power Adapter, NA Power Cord
00-00412	USB 2.0 Ranger 2324 - EU	4-Port USB 2.0 500m Multimode Fiber Optic Extender System, 100-240V Power Adapter, EU Power Cord
00-00413	USB 2.0 Ranger 2324 - UK	4-Port USB 2.0 500m Multimode Fiber Optic Extender System, 100-240V Power Adapter, UK Power Cord
00-00414	USB 2.0 Ranger 2324 - AU	4-Port USB 2.0 500m Multimode Fiber Optic Extender System, 100-240V Power Adapter, AU Power Cord
00-00415	USB 2.0 Ranger 2324 - JP	4-Port USB 2.0 500m Multimode Fiber Optic Extender System, 100-240V Power Adapter, JP Power Cord
00-00416	USB 2.0 Ranger 2344 - NA	4-Port USB 2.0 10km Singlemode Fiber Optic Extender System, 100-240V Power Adapter, NA Power Cord
00-00417	USB 2.0 Ranger 2344 - EU	4-Port USB 2.0 10km Singlemode Fiber Optic Extender System, 100-240V Power Adapter, EU Power Cord
00-00418	USB 2.0 Ranger 2344 - UK	4-Port USB 2.0 10km Singlemode Fiber Optic Extender System, 100-240V Power Adapter, UK Power Cord
00-00419	USB 2.0 Ranger 2344 - AU	4-Port USB 2.0 10km Singlemode Fiber Optic Extender System, 100-240V Power Adapter, AU Power Cord
00-00420	USB 2.0 Ranger 2344 - JP	4-Port USB 2.0 10km Singlemode Fiber Optic Extender System, 100-240V Power Adapter, JP Power Cord